

# Farenhyt

## IDP-Control-6

The IDP-Control-6 is an addressable notification module for use with Silent Knight IFP-series fire alarm control panels (FACPs). The IDP-Control-6 has six integrated modules for maximum flexibility, allowing you to add notification circuits wherever they are needed on an IFP FACP signaling line circuit (SLC) loop. The IDP-Control-6 provides supervised monitoring of wiring to load devices that require an external power supply or amplifier to operate, such as bells, horns, and strobes. It is capable of supporting Class B (Style Y) and Class A (Style Z) wiring.

Upon command from the FACP, the IDP-Control-6 will disconnect the supervision and connect the external power supply across the load device. The disconnection of the supervision provides a positive indication to the panel that the control relay actually turned on. The external power supply is always relay isolated from the SLC loop, so that a trouble condition on the power supply will never interfere with the rest of the system.

If needed, you can disable a maximum of three unused modules on the IDP-Control-6 board. Each module has terminals for connection to an external supply circuit for powering devices on its notification appliance circuit (NAC). One or more multiple power supplies or amplifiers can be used.

The IDP-Control-6 has a short circuit protection monitor for each module. The short circuit protection monitor protects external power supplies against short circuit conditions on the NAC. In addition, an algorithm is incorporated to find a short when the module is active. The module will close all circuits that are not shorted to find the NAC with the problem.

### Features

- Flexible solution for adding notification circuits where needed
- Removable 12 to 18 AWG plug-in terminal blocks
- Support for Class B or Class A wiring
- Individual LED for each module
- Two module mounting in the IDP-ACB cabinet
- Unused modules can be disabled
- Rotary address switches for fast installation
- Mounting hardware included
- UL Listed



**SILENT  
KNIGHT**

by Honeywell

7550 Meridian Circle, Suite 100  
Maple Grove, MN 55369  
763-493-6400 or 800-328-0103  
Fax: 763-493-6475  
www.farenhyt.com

Addressable Notification Module



IDP-Control-6

### Installation

The IDP-Control-6 mounts in the Silent Knight IDP-ACB cabinet (PN IDP-ACB). The IDP-ACB has a built-in chassis that will accommodate one or two IDP-Control-6 modules

### Compatibility

The IDP-Control-6 is compatible with the following FACPs:

- IFP-2000 Intelligent Fire Panel
- IFP-1000 Intelligent Fire Panel
- IFP-100 Intelligent Fire Panel
- IFP-50 Intelligent Fire Panel


### Ordering Information

IDP-Control-6                      Six input Notification Module


### Accessories

IDP-ACB                              IDP Module Cabinet.  
Cabinet holds two  
IDP-Control-6s.

P/N 350294 Rev C  
© Honeywell International Inc.

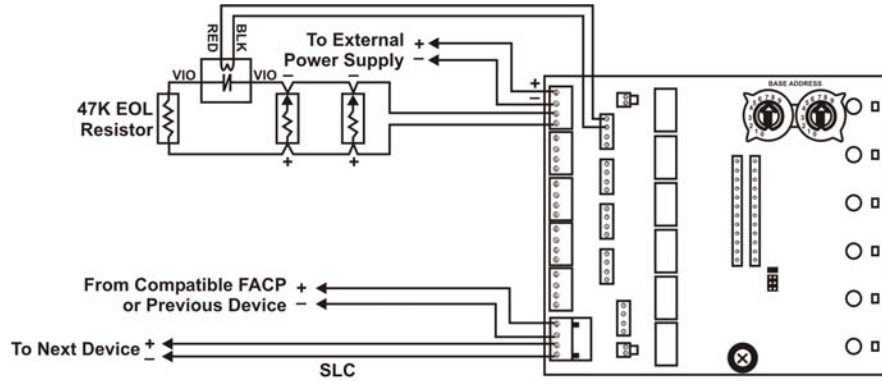

Wiring the IDP-Control-6 Notification Module for Class B, Style Y NAC Configuration with a Single Power Supply Dedicated to a Single NAC

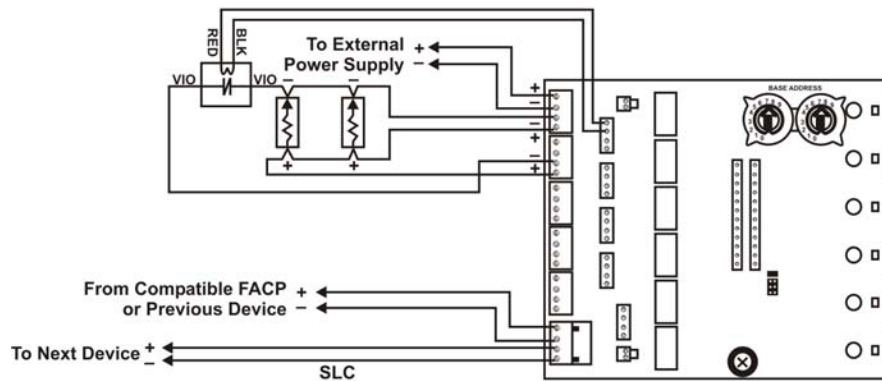

Wiring the IDP-Control-6 Notification Module for Class A, Style Z NAC Configuration with a Single Power Supply Dedicated to a Single NAC

## Specifications

### Physical

IDP-Control-6	IDP-ACB
Height: 6.8" (17.3 cm)	15.25" (38.7 cm)
Width: 5.8" (14.7 cm)	12.5" (31.8 cm)
Depth: 1.25" (3 cm)	3" (7.6 cm)
Shipping Weight: 6.3 oz (196 g)	6.5 lbs (2.8 kg)

### Environmental

Operating Temperature: 32°F – 120°F (0°C – 49°C)  
 Humidity: 10% – 93% non-condensing

### Electrical

Operating Voltage: 15 – 32 VDC  
 Alarm Current: 35 mA (all six relays switched once and all six LEDs solid on)  
 Standby Current: 2.2 mA max  
 SLC Loop Resistance: 40½ max  
 NAC Circuit Wiring Resistance: 40½ max  
 Power Rating Per Circuit: 63W @ 70.7 VAC; 50W @ 25 VAC

### Relay Contact Ratings:

3A @ 30 VDC resistive, noncoded;  
 2A @ 30 VDC resistive, coded;  
 0.9A @ 110 VDC resistive, noncoded;  
 0.9A @ 125 VDC resistive, noncoded;  
 0.5A @ 30 VDC inductive (L/R = 5 ms), coded;  
 1A @ 30 VDC inductive (L/R = 2 ms), coded;  
 0.3A @ 125 VAC inductive (PF = 0.35), noncoded;  
 1.5A @ 25 VAC inductive (PF = 0.35), noncoded;  
 0.7A @ 70.7 VAC inductive (PF = 0.35), noncoded;  
 2A @ 25 VAC inductive (PF = 0.35), noncoded



This document is not intended to be used for installation purpose. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or handicapped all requirements. All specifications are subject to change without notice. For more information contact Silent Knight 7550 Meridian Circle Suite 100, Maple Grove, MN 55369  
 Phone: 800-328-0103, fax: 763-493-6475  
 www.farenhyt.com



Made In USA