



Interface two-wire conventional detectors, NFPA Style B

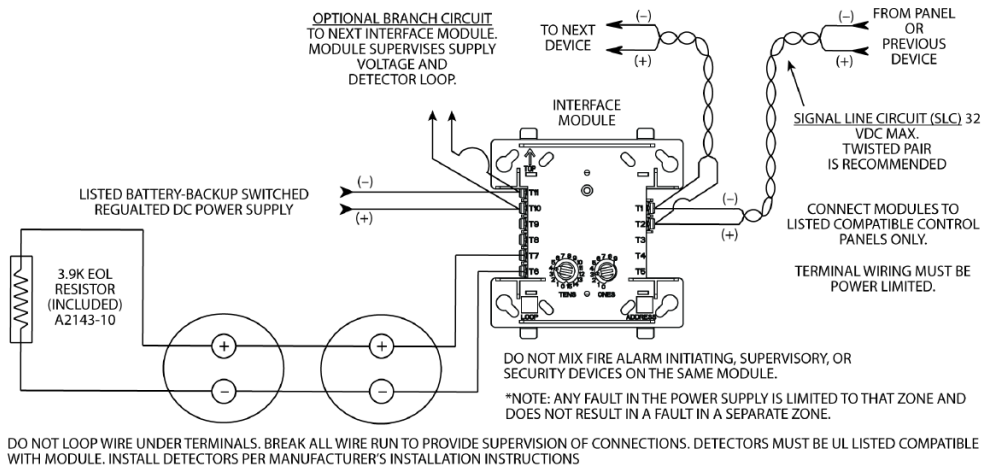

Interface two-wire conventional detectors, NFPA Style D

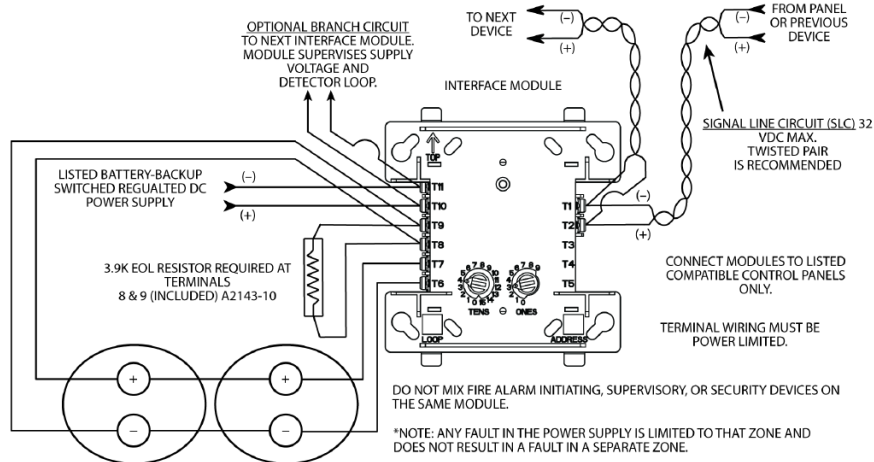

Specifications

Physical

Height: 4.5" (11.5 cm)

Width: 4.0" (10.2 cm)

Depth: 1.3" (3.2 cm)

Shipping Weight: 6.3 oz (196 g)

Environmental

Operating Temperature: 32°F – 120°F (0°C – 49°C)

Humidity: 10% – 93% non-condensing

Electrical

Operating Voltage: 15 – 32 VDC

Current Draw: 5.1 mA max (LED on)

Operating Current: 270 µA (LED flashing)

Standby Current: 300 µA max. @ 24 VDC with communication

End-of-Line Resistance: 3.9k Ω

SLC Loop Impedance: 40Ω

Initiating Device Circuit Wiring Resistance: 25Ω max

External Power Supply

Voltage: 18 – 28 VDC power limited

(19 – 28 VDC when used with intrinsically safe applications)

Ripple Voltage: 0.1V RMS max

Current: 90 mA per module


Current: 80 mA @ 24 VDC (nominal)

Standby Current: 11.5 mA @ 24 VDC (nominal)



by Honeywell

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice. For more information, contact Silent Knight 12 Clintonville Road, Northford, CT 06472-1610 Phone: (800) 328-0103, Fax: (203) 484-7118. www.farenhyt.com



Made in the U.S.A.