

Farenhyt

10 general purpose Form C relays

5883

Relay Interface Board

The 5883 Relay Interface Board provides 10 general purpose Form C relays that can be used to control any device that requires a dry contact closure. The interface board is activated by an open collector input from a controlling device such as a 5880 LED Driver Module.

Features

- 10 general purpose Form C relays
- Relays rated at 5.0A @ 30 VDC or 250 VAC resistive
- Controls any dry contact device
- Housed in protective cabinet



Specifications


Operating Voltage:	24 VDC
Form C Relay	5.0 A @ 30 VDC or 250 VAC resistive
Current Draw:	
Standby:	0 mA
Alarm:	220 mA (22 mA/Relay)
Cabinet Dimensions:	Length: 10-2/8" (26.04 cm) Width: 10-3/8" (26.35 cm) Depth: 3-1/8" (7.94 cm)
Operating Temperature:	32°F to 120°F (0°C to 49°C)
Humidity:	10 to 85% RH
Indoor Use Only	




**SILENT
KNIGHT**

7550 Meridian Circle
Maple Grove, Mn 55369-4927
612-493-6455
1-800-328-0103
Fax: 612-493-6475

P/N 350240 01/00
Copyright © 2000 Silent Knight

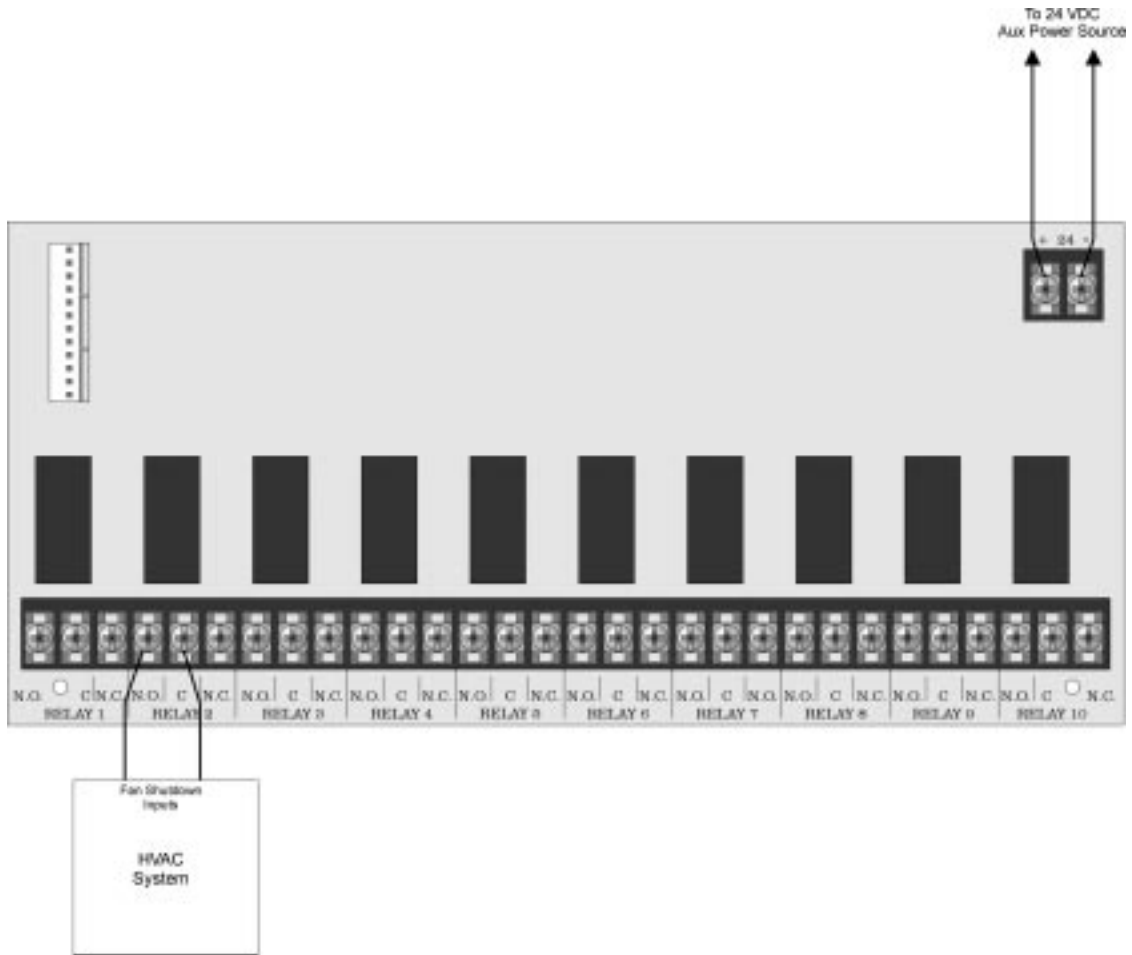

Wiring Diagram

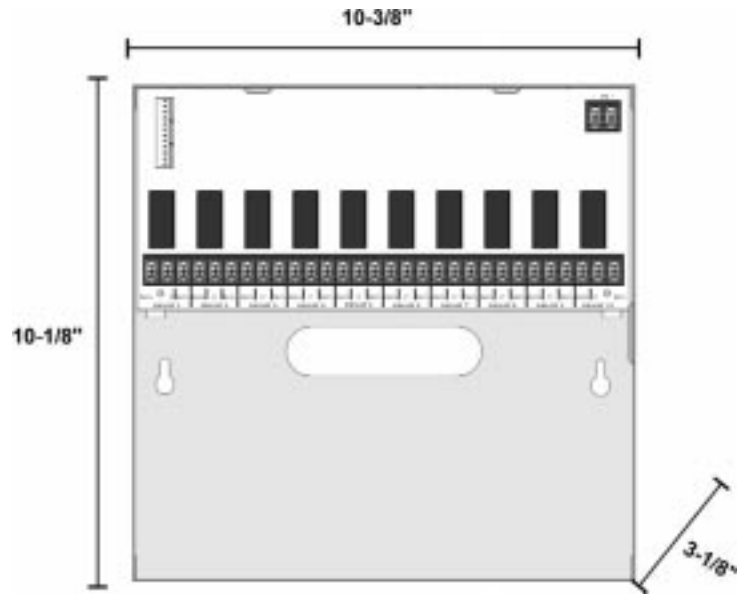

Dimensions



Made in the U.S.A.